
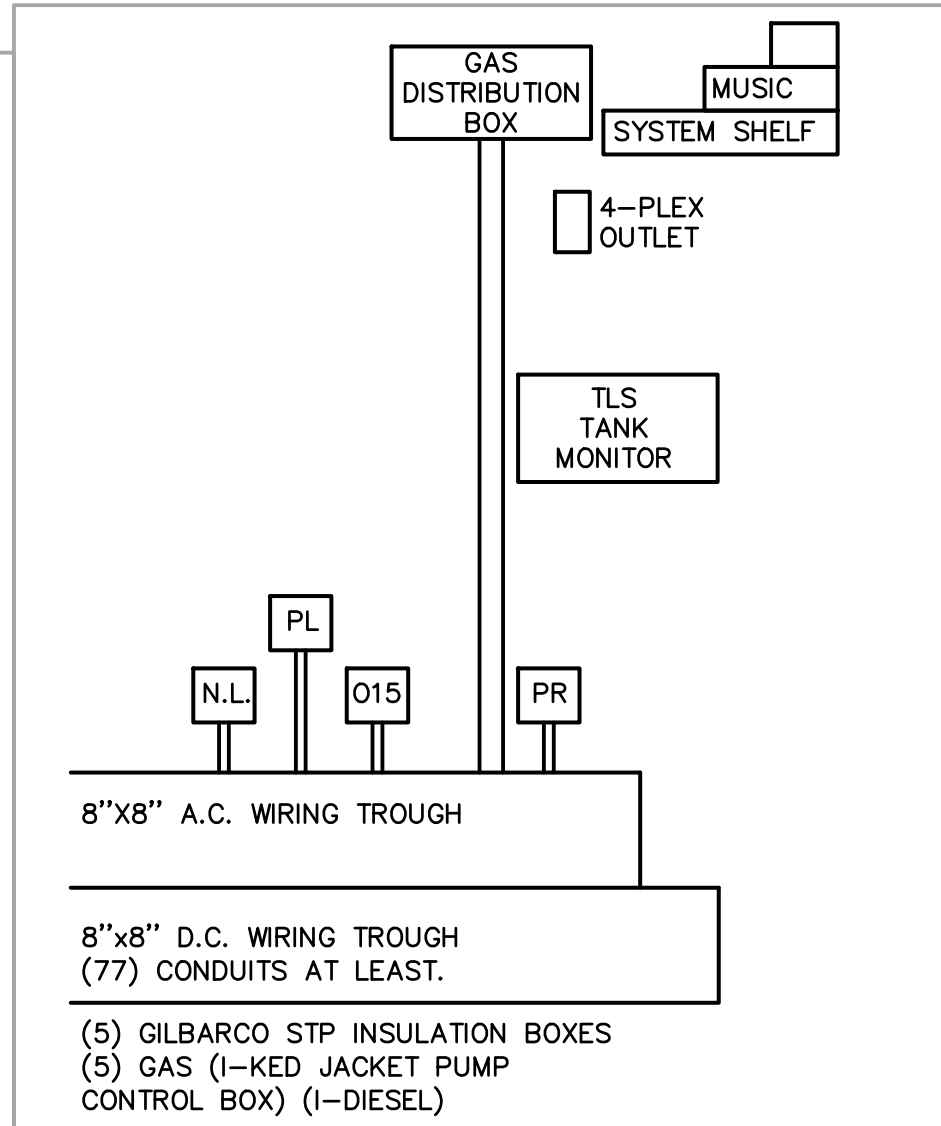


[illegible]

PROVIDE INTERMATIC ET90115C SINGLE CIRCUIT 365 DAY TIME CLOCK FOR EXTERIOR LIGHTING THROUGH SHUNT TRIP FUNCTION OF PANEL "D1"

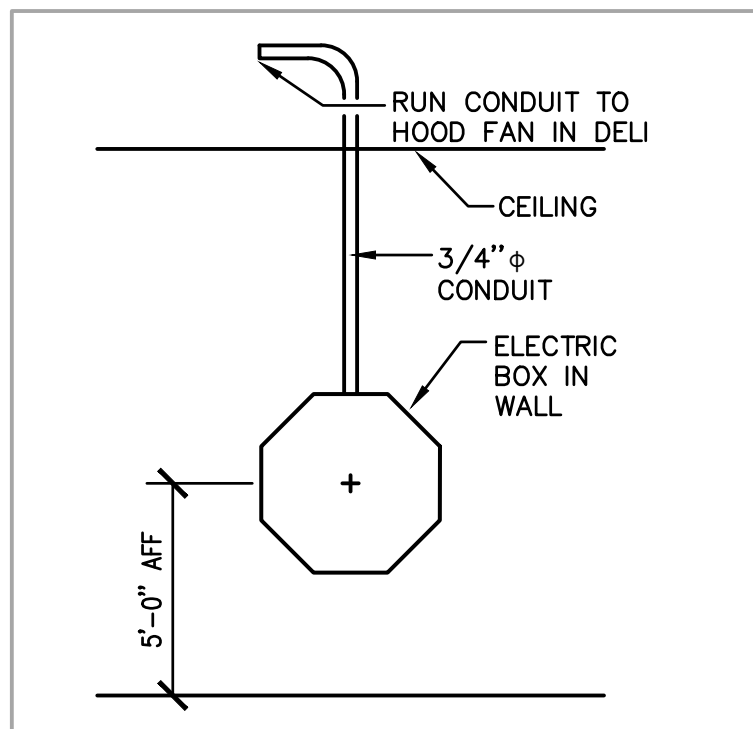


ELECTRICAL LEGEND, NOTES AND DETAILS

FiveStar - #4947 Lawrenceburg
NEWCOMB OIL CO., LLC
 CARLTON CROSSING - LOT 7
 LAWRENCEBURG, KY 40342

Project Number
24051.03

E1.00

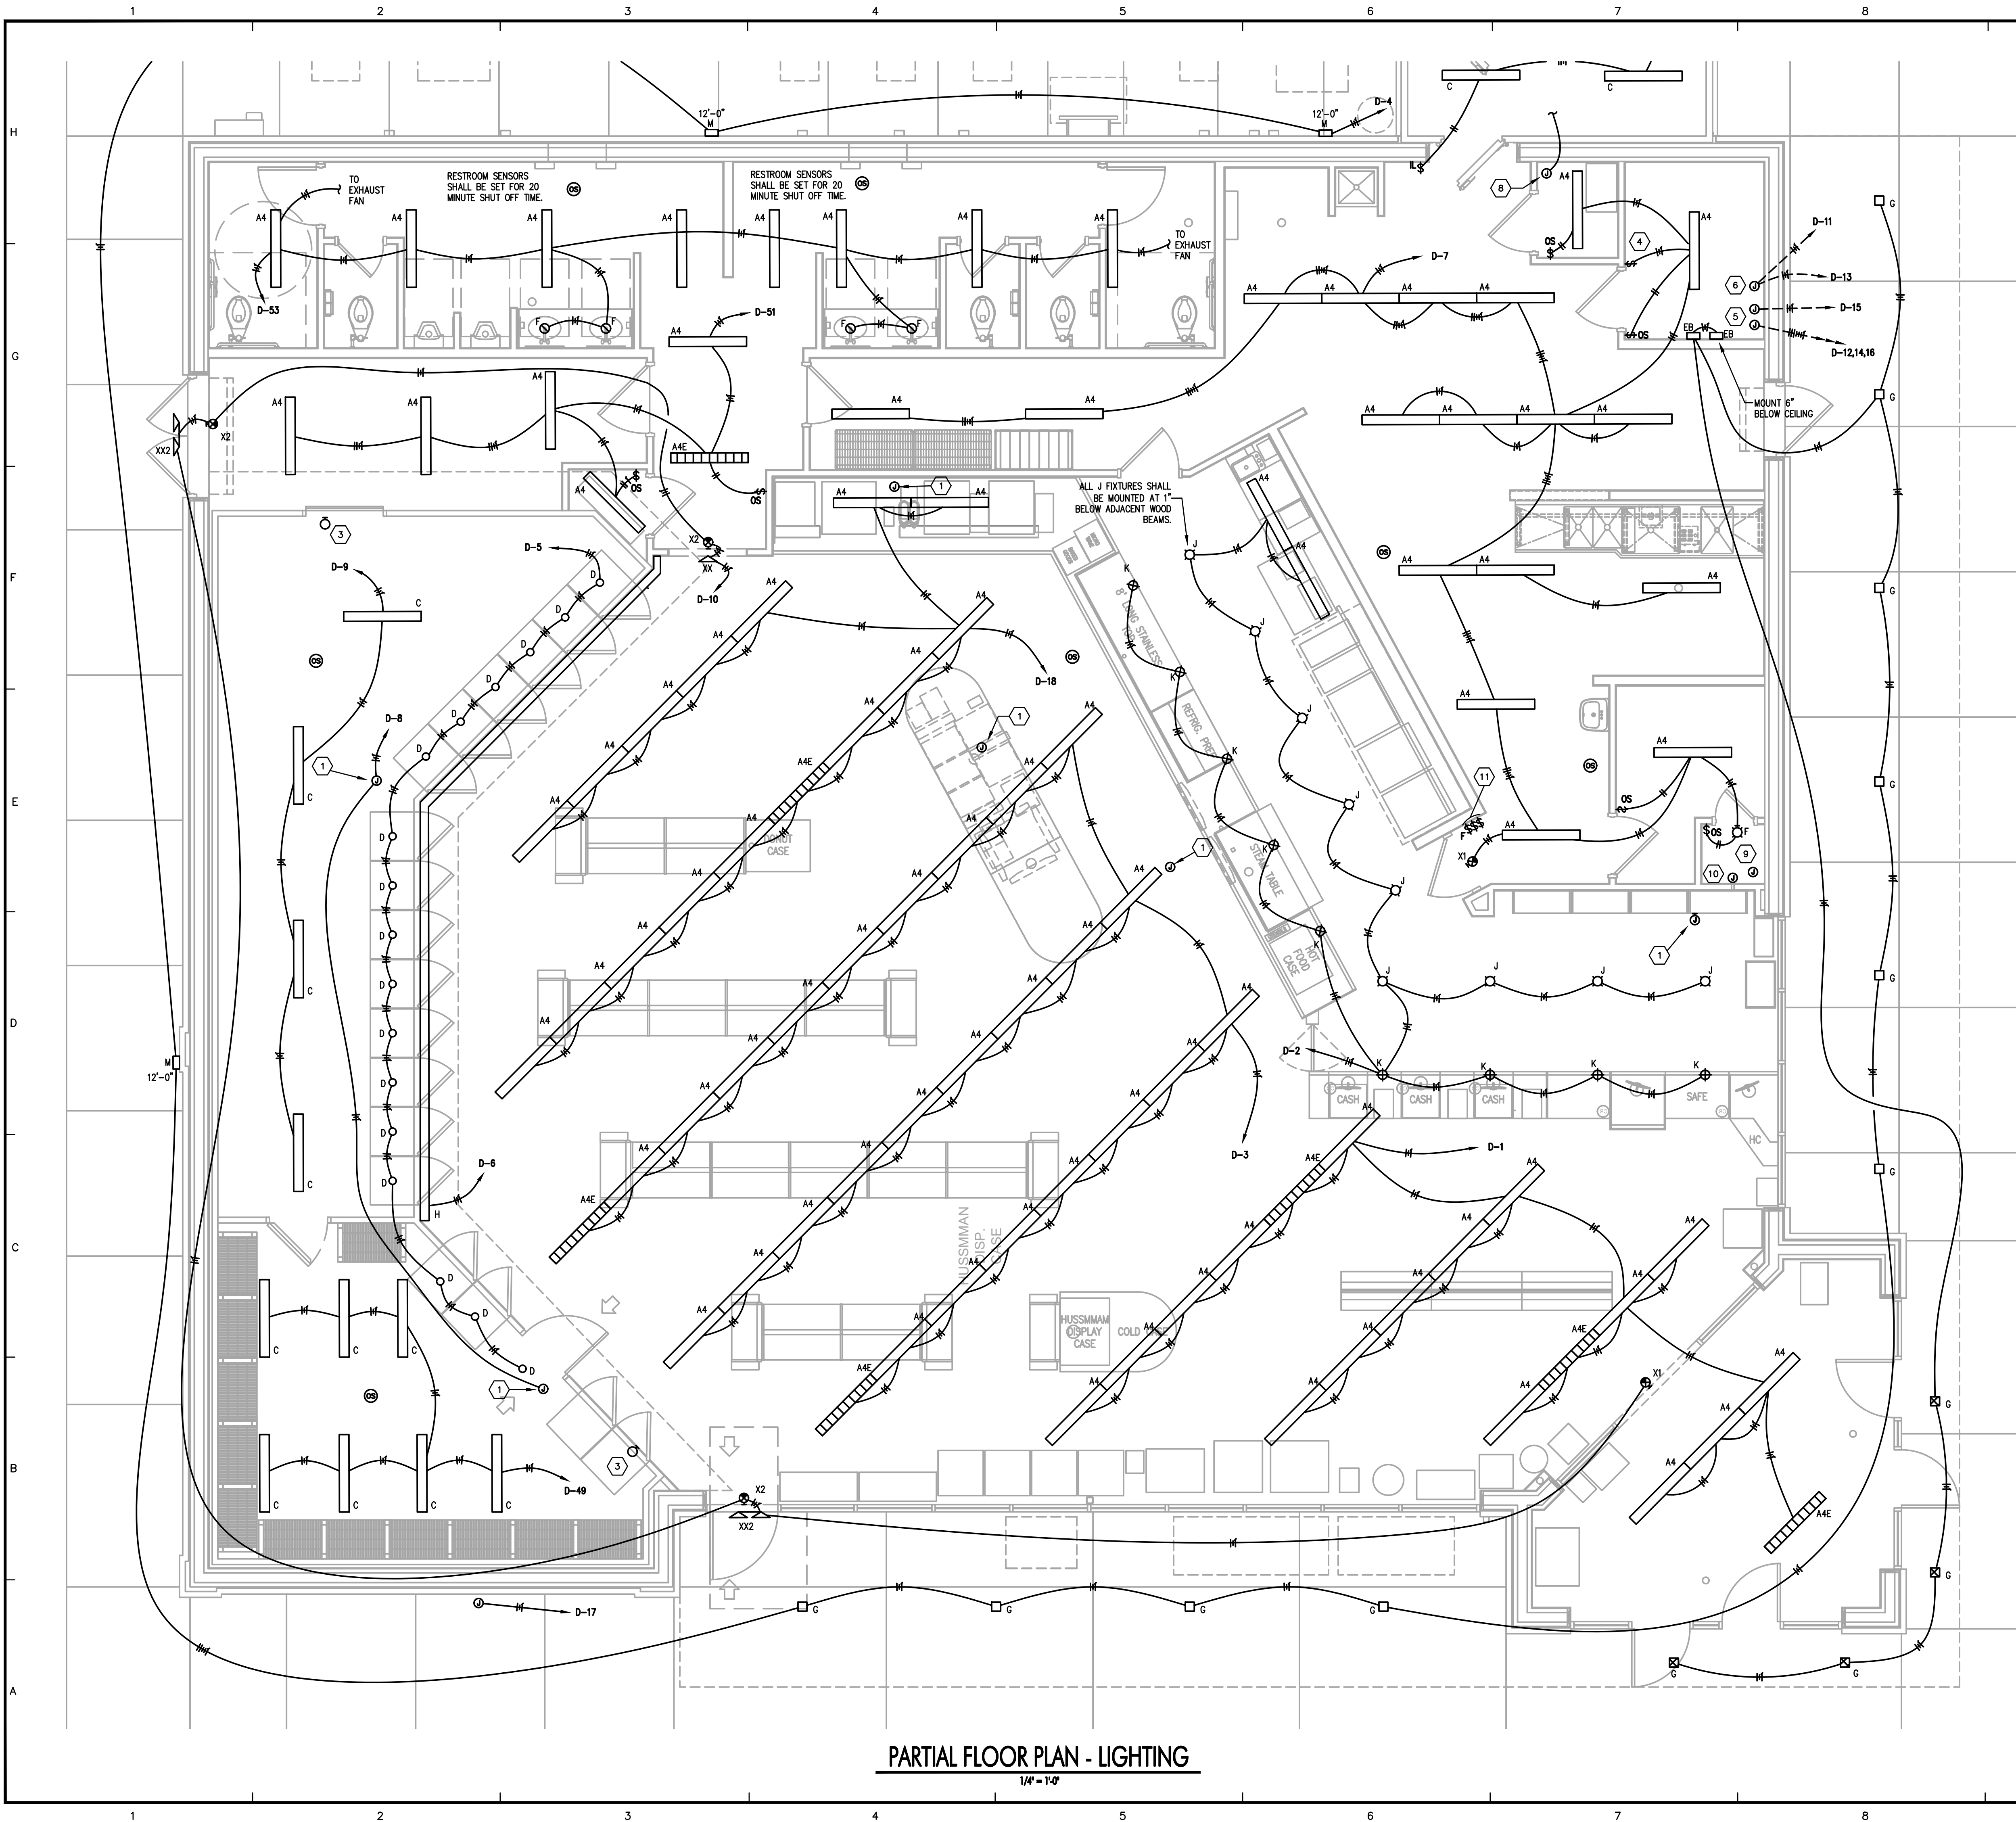


PARTIAL FLOOR PLAN - LIGHTING
1/4" = 1'-0"

GENERAL NEW WORK NOTES (LIGHTING):

- REFER TO THE ARCHITECT'S REFLECTED CEILING PLANS FOR EXACT LOCATIONS OF ALL CEILING MOUNTED LIGHT FIXTURES ETC. REFER ALSO TO THE ARCHITECT'S CASEWORK DETAILS AND ROOM ELEVATIONS FOR EXACT LOCATIONS AND MOUNTING HEIGHTS OF LIGHT FIXTURES, ETC.
- ALL NEW WIRING SHALL BE #12 WITH A #12 INSULATED GROUND WIRE (I.O.N.). CONDUIT SHALL BE 3/4" MINIMUM.
- CONTRACTOR SHALL FOLLOW BRANCH CIRCUITING LAY-OUT, AS INDICATED ON THE FLOOR PLANS, WITH A MAXIMUM OF THREE (3) BRANCH CIRCUITS PER HOMERUN. EACH BRANCH CIRCUIT SHALL BE PROVIDED WITH A DEDICATED NEUTRAL CONDUCTOR. DEDICATED NEUTRAL CONDUCTORS SHALL BE CONSIDERED CURRENT CARRYING. IF ADDITIONAL CONDUCTORS ARE RAN IN THE SAME CONDUIT WITH THOSE INDICATED, CONTRACTOR SHALL DERATE ALL CURRENT CARRYING CONDUCTORS PER N.E.C. #310.15(B)(3), AND UPSIZE CONDUIT AS REQUIRED PER N.E.C. #300.17 AND ANNEX C. MULTIWIRE BRANCH CIRCUITS AS DEFINED IN N.E.C. #100 / 210.4 (CIRCUITS SHARING A COMMON NEUTRAL CONDUCTOR) SHALL NOT BE PERMITTED.
- ALL UNDERGROUND TRENCHES SHALL BE FILLED WITH STONE.
- MC CABLING SHALL BE ACCEPTABLE WHERE CONCEALED IN WALLS AND CEILINGS. EMT SHALL BE USED AT ALL EXPOSED LOCATIONS.
- A DIMENSIONED AND DETAILED AS-BUILT PLAN SHALL BE PROVIDED BY THE CONTRACTOR INDICATING ALL CONDUIT ROUTES. THE CONTRACTOR SHALL TAKE AND PROVIDE PHOTOS OF ALL UNDERGROUND UTILITIES PRIOR TO COVERING OF TRENCHES.
- ALL EMPTY CONDUITS FOR FUTURE USE SHALL BE PROVIDED WITH A PULL STRING.
- ALL CONDUITS STUBBED UP FROM FLOOR INTO WIRING TROUGH SHALL BE SEALED AS REQUIRED FOR GAS SEALS. THIS SHALL APPLY TO ALL CONDUITS IN THE TROUGH WHETHER SERVING GAS EQUIPMENT OR NOT.
- ALL SWITCHES SHALL BE MOUNTED AS TIGHT TO DOOR FRAMES AS POSSIBLE TO MAXIMIZE AVAILABLE WALL SPACE. PROVIDE MULTIGANG SWITCHBOXES WHEREVER POSSIBLE. NO SWITCHES SHALL BE MOUNTED ANY MORE THAN 12" FROM DOOR FRAME.



TAGGED NOTES (LIGHTING) :

- DECORATIVE GRAPHICS LIGHTING J-BOX. ROUTE ALL CONDUIT AND WIRING CONCEALED TO SIGNAGE. PROVIDE BOX IN VERTICAL FACE OF SOFFIT AS REQUIRED. CONNECTION SHALL BE CENTERED OVER SHELVING AND LOCATED 9" ABOVE THE TOP OF THE OPENING. CONTROL WITH INTERIOR LIGHTING. PROVIDE WITH 14-1/2" WIDE X 6" TALL X 4" DEEP JUNCTION BOX ACCESSIBLE FROM THE MANAGER'S OFFICE WITH ONE CIRCUIT AND NIPPLE OUT THE BACKSIDE TO FEED SIGN. MOUNT 8-1/2" ABOVE FINISHED OPENING CENTERED OVER SHELVING. COORDINATE EXACT ELEVATION WITH ALL TRADES PRIOR TO ROUGH-IN.
- EXTERIOR LIGHTING CIRCUIT SHALL BE CONTROLLED THROUGH EXTERIOR LIGHTING PHOTOCELL AS REQUIRED. PROVIDE UNSWITCHED CONDUCTOR BYPASSING PHOTOCELL FOR CONNECTION TO BATTERY BACK UP "EB" DEVICES IN OFFICE 103.
- FREEZER VAPOR PROOF LIGHT PROVIDED WITH COOLER SHALL NOT BE CONNECTED.
- PROVIDE SWITCH AT LOCATION INDICATED FOR OVERRIDE OF OCCUPANCY SENSOR IN ROOM. SWITCH SHALL PROVIDE BYPASS OF OCCUPANCY SENSOR RELAY AS REQUIRED FOR OVERRIDE.
- PROVIDE CONNECTIONS TO SITE LIGHTING POLES AS REQUIRED BY SITE PLAN. PROVIDE ADDITIONAL CIRCUIT TO EACH LIGHTING POLE MARKED WITH AN ASTERISK FOR BASE MOUNTED RECEPTACLE. RECEPTACLE SHALL BE MOUNTED ON POLE BASE AND NOT AT POLE ACCESS BOX. REFER TO SITE SPECIFIC DRAWINGS FOR FURTHER REQUIREMENTS.
- REFER TO SITE SPECIFIC PLANS FOR EXACT SIGN LOCATIONS AND REQUIREMENTS. SITE SIGNAGE SHALL BE WIRED IN THE FOLLOWING MANNER:
 - (2) 1" CONDUITS FROM THE ELECTRICAL ROOM TO EACH SIGN. DO NOT LOOP CONDUITS FROM ON SIGN TO ANOTHER.
 - ON THE POLE SIGN, PROVIDE (2) 3/4" CONDUITS THAT LOOP FROM ONE LEG OF THE SIGN TO THE OTHER LEG OF THE SIGN.
- ONE CONDUIT TO EACH SIGN SHALL HAVE (3) 120V 20 AMP CIRCUITS WITH #10 CONDUCTORS AND GROUND FOR EACH CIRCUIT. (2) CIRCUITS SHALL ALWAYS BE HOT AND ONE SHALL BE SWITCHED WITH THE EXTERIOR LIGHTING PHOTOCELL.
- ONE CONDUIT TO EACH SIGN IS FOR FUTURE LOW VOLTAGE USE. THIS CONDUIT SHALL NOT BE LOOPED BETWEEN SIGNS.
- THE SIGN CONDUIT SHALL NOT BE COMBINED WITH AREA LIGHTING. ALL AREA LIGHTS SHALL BE FEED THROUGH SEPARATE CONDUITS.
- ALL BUILDING SIGNS SHALL BE INSTALLED BY THE ELECTRICAL CONTRACTOR.
- PROVIDE PERMANENT LABELS ON SWITCHES TO INDICATE LOAD SERVED.
- PROVIDE 2" CONDUIT FROM NEW SATELLITE LOCATION TO ELECTRIC ROOM. SATELLITE WILL NEED TO BE LOCATED TO A NON CANOPY LOCATION OUT THE BACK OF THE STORE FACING SOUTH EAST.
- PROVIDE 1" CONDUIT FROM CLOSET TO ALL SITE CANOPIES FOR SURVEILLANCE CAMERAS. COORDINATE EXACT REQUIREMENTS WITH SITE PLANS.
- PROVIDE 2" CONDUIT FROM OFFICE CLOSET TO 12" ABOVE ATTIC INSULATION.
- PROVIDE SWITCHES WITH PERMANENT LABELS INDICATING FUNCTION FOR THE FOLLOWING ITEMS:
 - INTERIOR LIGHTING SWITCH: INTERIOR LIGHTING CIRCUITS SHALL BE ROUTED THROUGH INTERIOR LIGHTING CONTRACTOR FOR CONTROL OF ALL INTERIOR ZONE.
 - EXTERIOR LIGHTING SWITCH: SHALL OVERRIDE EXTERIOR LIGHTING CONTRACTOR.
 - FAN SPEED CONTROL SWITCH.

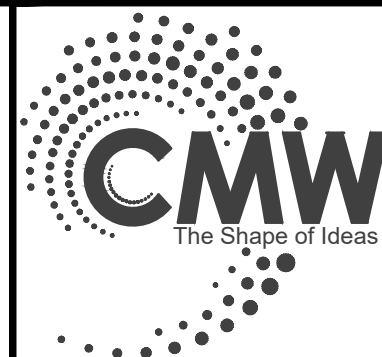

Architecture
Civil Engineering
Landscape Architecture
at: 249 East Main Street
Suite 100
Lexington, Kentucky 40507
o: (859) 254-6623
w: www.cmwmaec.com

CMTA

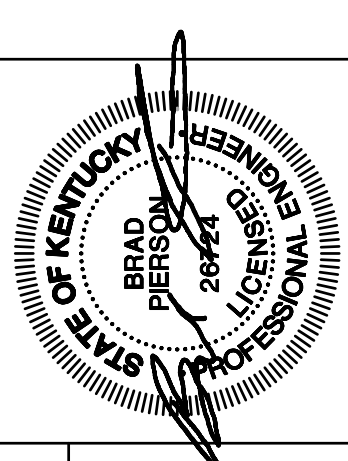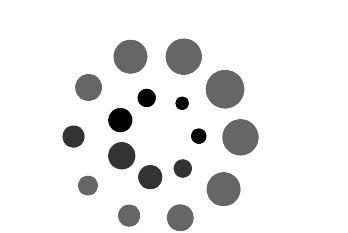

PARTIAL FLOOR PLAN - LIGHTING
FiveStar - #4947 Lawrenceburg
NEWCOMB OIL CO., LLC
CARLTON CROSSING - LOT 7
LAWRENCEBURG, KY 40342

CONSTRUCTION DOCUMENTS


Issue Date: March, 03 2025
Drawn By: CJP
Checked By: BMP
Revisions:

Mark Date
AHJ SEAL

Project Number
24051.03

E2.00

$$1/4^* = 1'0$$
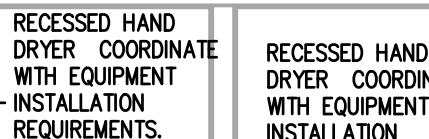
$$1/4^{\circ} = 1^{\circ}0'$$


A. REFER TO THE ARCHITECT'S REFLECTED CEILING PLANS FOR EXACT LOCATIONS OF ALL CEILING MOUNTED LIGHT FIXTURES ETC. REFER ALSO TO THE ARCHITECT'S CASEWORK DETAILS AND ROOM ELEVATIONS FOR EXACT LOCATIONS AND MOUNTING HEIGHTS OF LIGHT FIXTURES, ETC.

- D

1. PROVIDE EMERGENCY KILL SWITCH, ROUGH-IN AND STUB OUT ON EXTERIOR OF BUILDING FOR EMERGENCY PUMP SHUT DOWN. PROVIDE ADDITIONAL SINGLE GANG BOX BELOW FOR SPEAKER, ROUGH-IN/NS SHALL BE CENTERED ABOUT BRICK. PROVIDE CONNECTION TO GAS PUMP PANEL SHUNT TRIP CONTROL. AS REQUIRED, THE SHUNT SHALL BE ON SIDE OF BUILDING FACING PUMP. ISLAND COORDINATE EXACT LOCATION FACING FILLING AREA WITH PUMP INSTALLER. COORDINATE PUMP TO START OF CONSTRUCTION FOR UNDERGROUND ROUTING REQUIREMENTS.
2. ALL RECEPTACLES AND DEVICES AT THE CHECK OUT COUNTER SHALL BE MOUNTED HIGH IN THE BACK OF CASEWORK. COORDINATE EXACT MOUNTING LOCATION WITH ALL TRADES PRIOR TO ROUGH-IN. REFER TO ARCHITECTURAL ELEVATIONS.

11. INSTALL A LOWES 56" DIAMETER CEILING HUGGER CEILING FAN. FAN SHALL BE ALL WHITE. PROVIDE VARIABLE SPEED CONTROLLERS (LUTRON FSE-FE OR EQUAL) AT LOCATION INDICATED IN STORAGE ROOM.

12. NETWORK SWITCHES AND PATCH PANELS SHALL BE PROVIDED BY OWNER AND LOCATED IN ELECTRICAL ROOM AS INDICATED. UNLESS OTHERWISE NOTED, PROVIDE SHIELDED, CAT 6 NETWORK CABLING FROM PHONE AND DATA DROPS INDICATED ON PLANS BACK TO THIS LOCATION. TERMINATE AND LABEL CABLING PER OWNER REQUIREMENTS. PROVIDE TELECOM UTILITY RACEWAYS FROM SITE TO RACK LOCATION. PROVIDE DEDICATED UTILITY SERVICE CONDUIT FOR LOTTERY PHONE LINE. COORDINATE EXACT REQUIREMENTS WITH OWNER AND SITE CONTRACTOR PRIOR TO ROUGH-IN. NETWORK AND VOICE CABLING SHALL BE CONTINUOUS AND SHALL NOT BE SPLICED

- COMPLETELY TO THE BACK OF THE COUNTER.



A. REFER TO THE ARCHITECT'S REFLECTED CEILING PLANS FOR EXACT LOCATIONS OF ALL CEILING MOUNTED LIGHT FIXTURES ETC. REFER ALSO TO THE ARCHITECT'S CASEWORK DETAILS AND ROOM ELEVATIONS FOR EXACT LOCATIONS AND MOUNTING HEIGHTS OF LIGHT FIXTURES, ETC.

- A. REFER TO THE ARCHITECT'S REFLECTED CEILING PLANS FOR EXACT LOCATIONS OF ALL CEILING MOUNTED LIGHT FIXTURES ETC. REFER ALSO TO THE ARCHITECT'S CASEWORK DETAILS AND ROOM ELEVATIONS FOR EXACT LOCATIONS AND MOUNTING HEIGHTS OF LIGHT FIXTURES, ETC.
- B. ALL NEW WIRING SHALL BE #12 WITH A #12 INSULATED GROUND WIRE (U.O.N.). CONDUIT SHALL BE 3/4" MINIMUM.

1. DECORATIVE GRAPHICS LIGHTING J-BOX. ROUTE ALL CONDUIT AND WIRING CONCEALED TO SIGNAGE. PROVIDE BOX IN VERTICAL FACE OF SOFFIT AS REQUIRED. CONNECTION SHALL BE CENTERED OVER SHELVEING AND LOCATED 9" ABOVE THE TOP OF THE OPENING. CONTROL WITH INTERIOR LIGHTING. PROVIDE

1. DECORATIVE GRAPHICS LIGHTING J-BOX. ROUTE ALL CONDUIT AND WIRING CONCEALED TO SIGNAGE. PROVIDE BOX IN VERTICAL FACE OF SOFFIT AS REQUIRED. CONNECTION SHALL BE CENTERED OVER SHELVEING AND LOCATED 9" ABOVE THE TOP OF THE OPENING. CONTROL WITH INTERIOR LIGHTING. PROVIDE WITH 14-1/2" WIDE X 6" TALL X 4" DEEP JUNCTION BOX ACCESSIBLE FROM THE MANAGER'S OFFICE WITH ONE CIRCUIT AND NIPPLE OUT THE BACKSIDE TO FEED SIGN. MOUNT 8-1/2" ABOVE FINISHED OPENING CENTERED OVER SHELVEING. COORDINATE EXACT ELEVATION WITH ALL TRADES PRIOR TO ROUGH-IN.

* - DEVICES INDICATED WITH ASTERISKS SHALL BE ROUGHED IN WITH WIRE AND CONDUIT BUT PROVIDED WITH BLANK PLATE.

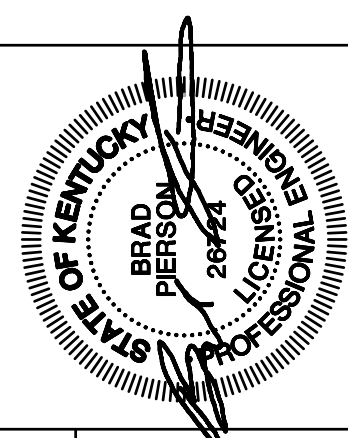


FiveStar - #4947 Lawrenceburg
NEWCOMB OIL CO., LLC
CARLTON CROSSING - LOT 7
LAWRENCEBURG, KY 40342

Issue Date: March, 03 2023


Issue Date:	March, 03 2023
-------------	----------------

Project Number
24051.03



E2.01

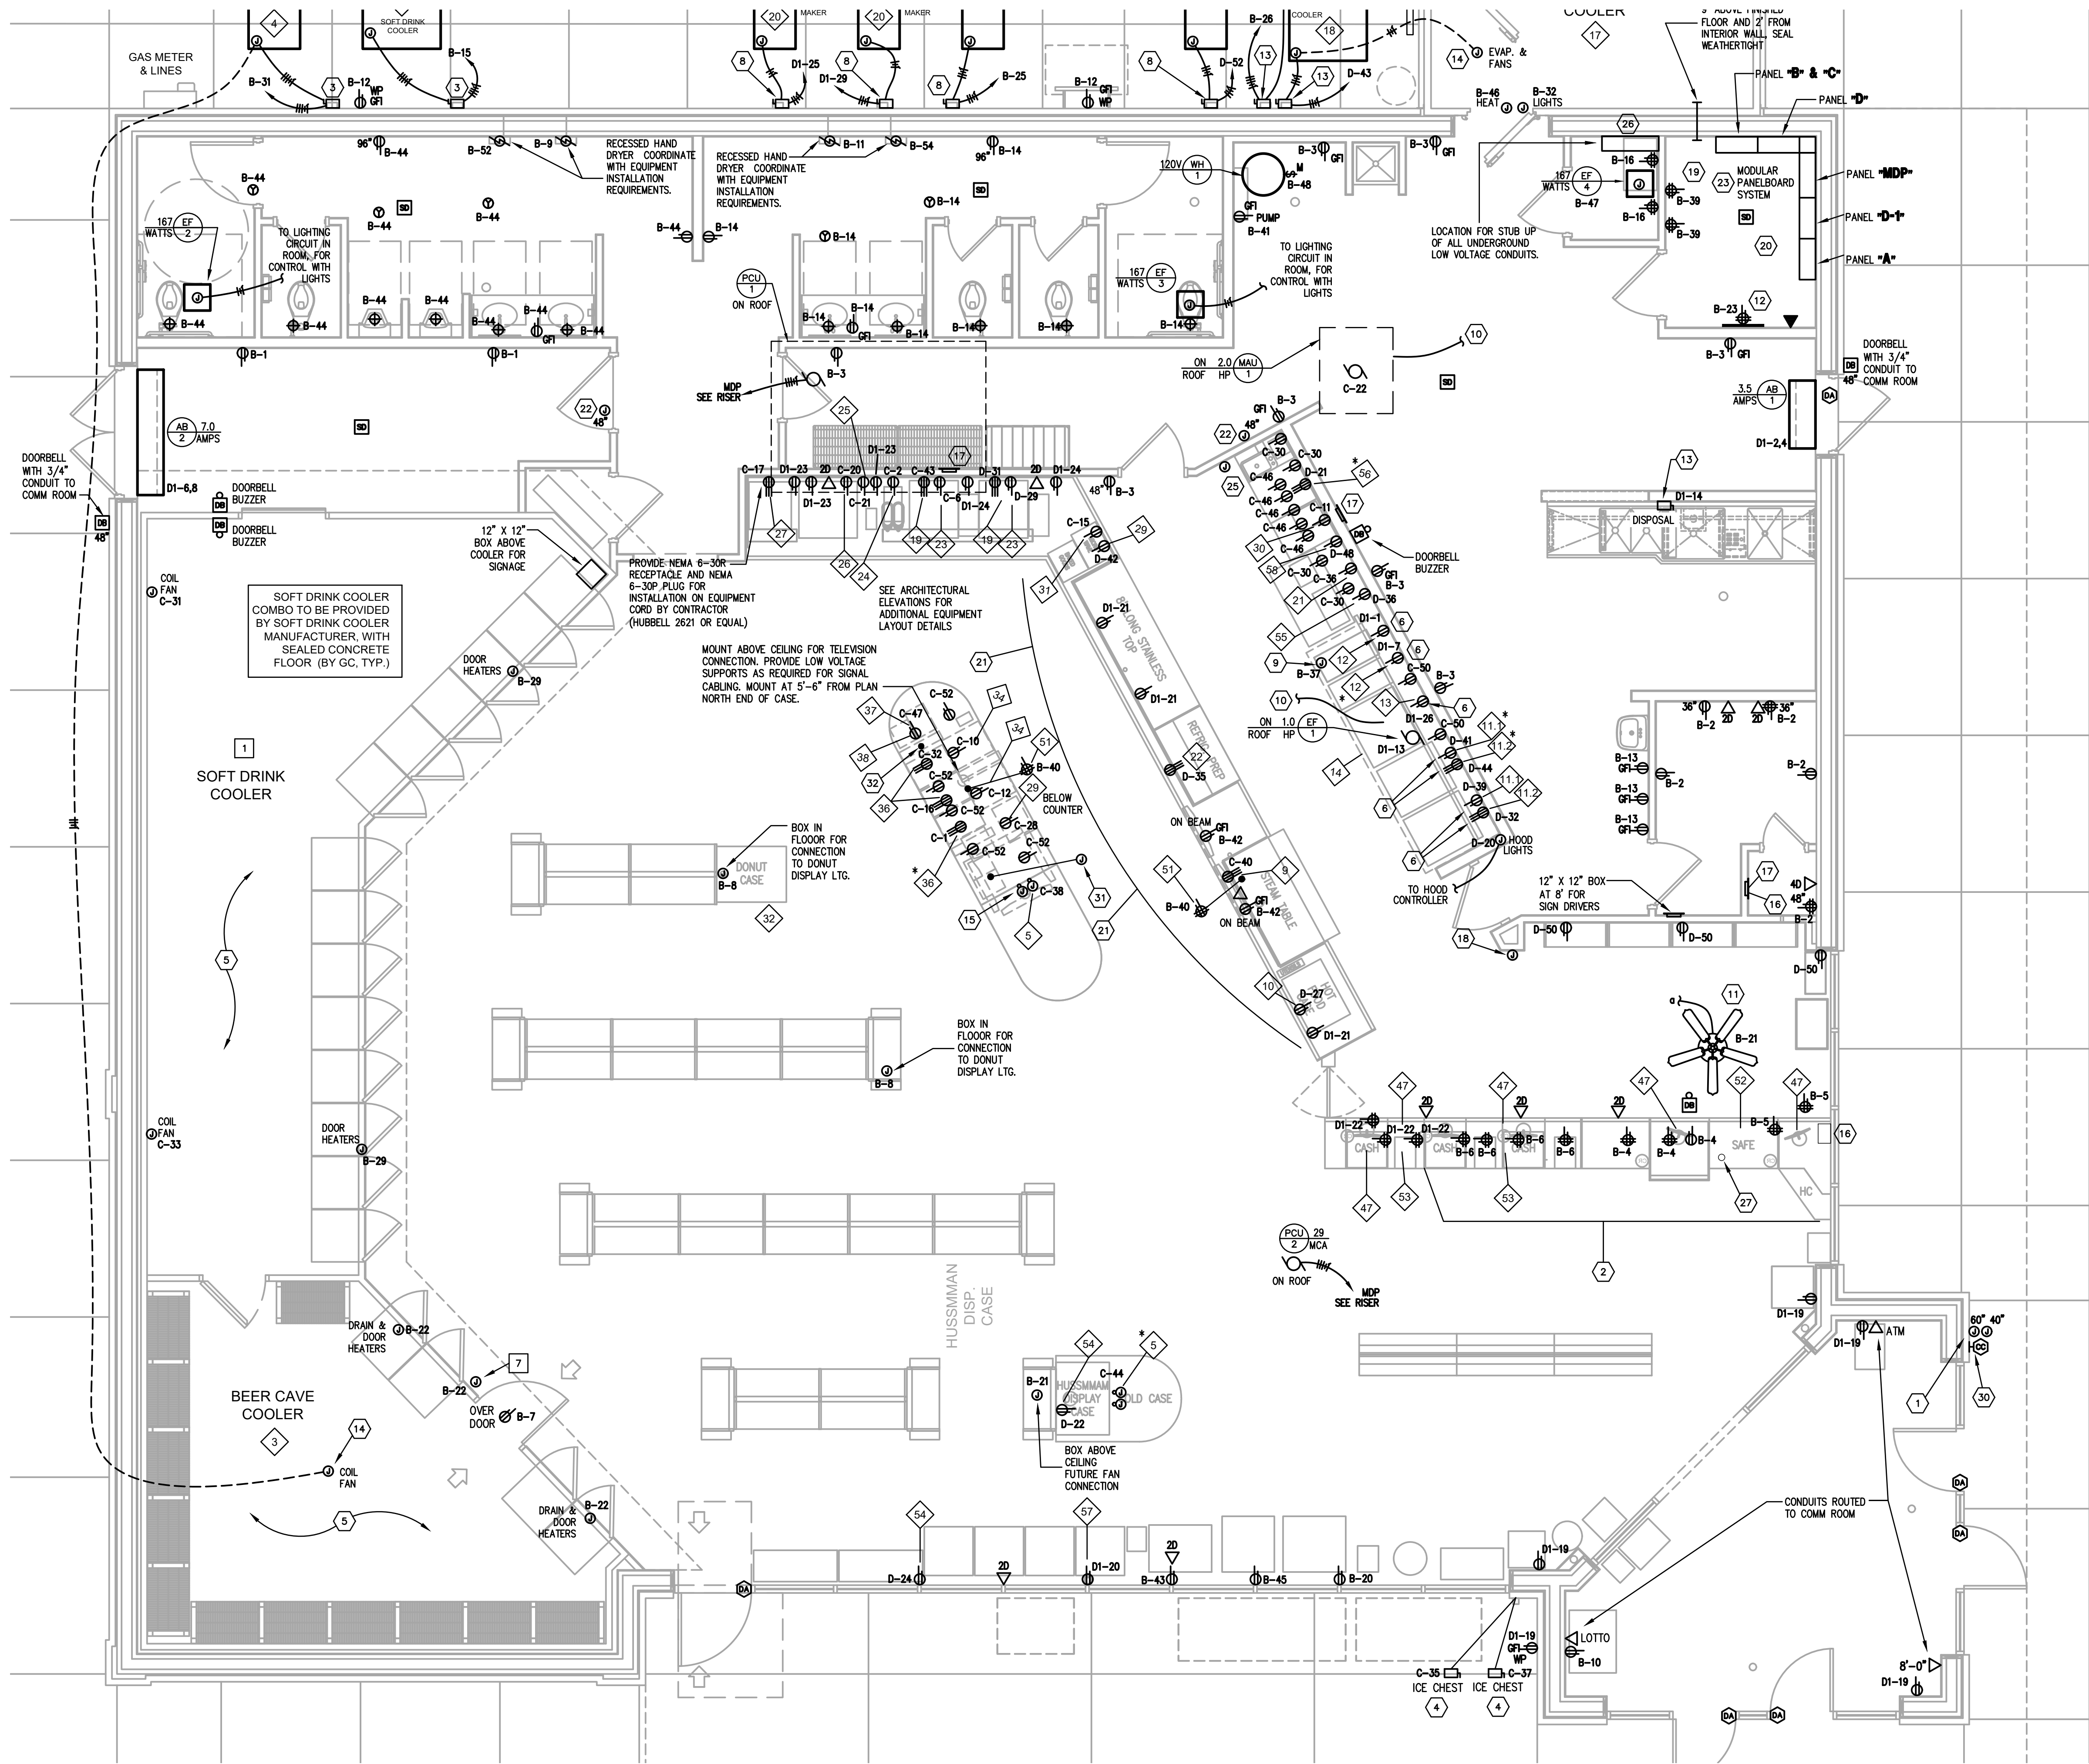

PARTIAL ELECTRICAL - POWER/SYSTEMS
1/4" = 1'-0"

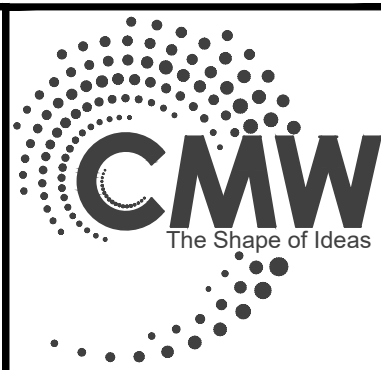

Architecture
Civil Engineering
Landscape Architecture
a: 249 East Main Street
Suite 100
Lexington, Kentucky 40507
o: (859) 254-6623
w: www.cmwlab.com

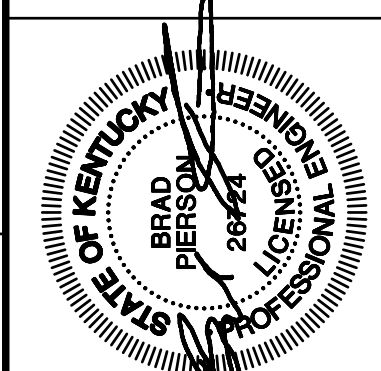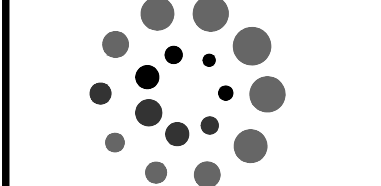

PARTIAL FLOOR PLAN - POWER/SYSTEMS
FiveStar - #4947 Lawrenceburg
NEWCOMB OIL CO., LLC
CARLTON CROSSING - LOT 7
LAWRENCEBURG, KY 40342

CONSTRUCTION DOCUMENTS

Issue Date:	March, 03 2025
Drawn By:	CJP
Checked By:	BMP
Revisions:	
Mark	Date
AHJ SEAL	

Project Number
24051.03

E3.00


PANELBOARD AND WIRING SCHEDULE - (Double Tub, Double Trim)

PANELBOARD:		A			AMPERES:	100	VOLTAGE 120/208	PHASE	1	WIRE:	3	MANUF.:	SQUARE D	TYPE:	MODULAR		
GND	CON	LOAD			DESIGNATION	WIRE	BKR	CKT	CKT	BKR	WIRE	DESIGNATION	LOAD			CON	GND
		A	B	C									A	B	C		
12	3/4"	1.4			DISP 1+2	12	15/2	1	2	15/2	12	UNL STP	1.1			3/4"	12
12	3/4"			1.4	DISP 3+4	12	15/2	3	4	---	---	---			1.1	---	---
12	3/4"	1.4			DISP 5+6	12	15/2	5	6	15/2	12	SUPER STP	1.1			3/4"	12
12	3/4"			1.4	DISP 7+8	12	15/2	7	8	---	---	---			1.1	---	---
12	3/4"	1.4			DISP 9+10	12	15/2	9	10	15/2	12	DIESEL STP	1.1			3/4"	12
12	3/4"			1.4	DISP 11+12	12	15/2	11	12	---	---	---			1.1	---	---
12	3/4"	1.4			DISP 13+14	12	15/2	13	14	15/2	12	K-1 STP	0.7			3/4"	12
12	3/4"			1.4	DISP 15+16	12	15/2	15	16	---	---	---			0.7	---	---
12	3/4"	1.4			DISP 17+18	12	15/2	17	18	15/2	12	DEF STP	0.8			3/4"	12
12	3/4"			0.6	GAS CANOPY LIGHTS	12	15/1	19	20	---	---	---			0.8	---	---
12	3/4"	0.6			GAS CANOPY LIGHTS	12	15/1	21	22	15/1	12	DIESEL CANOPY LIGHTS	0.6			3/4"	12
12	3/4"			0.6	GAS CANOPY LIGHTS	12	15/1	23	24	15/1	12	DIESEL CANOPY SIGN			1.0	3/4"	12
12	3/4"	1.0			GAS CANOPY SIGN	12	15/1	25	26	20/2	---	---					
					-----			27	28	---	---	---					
					SPARE SWITCHED NEUTRAL			15/2 29	30	20/2	---	---					
					-----			---	31	32	---	---					
					SPARE SWITCHED NEUTRAL			15/2 33	34	20/2	---	---					
					-----			---	35	36	---	---					
					SPARE SWITCHED NEUTRAL			15/2 37	38	20/2	---	---					
					-----			---	39	40	---	---					
					SPACE			41	42	15/1 12	---	---	1.0			3/4"	12
					SPACE			43	44	15/1	---	---					
					SPACE			45	46	15/1	---	---					
					SPACE			47	48	20/1	---	---					
					SPACE			49	50	20/1	---	---					
					SPACE			51	52	20/1	---	---					



					-----		</										

PANELBOARD AND WIRING SCHEDULE																				
PANELBOARD:		B		AMPERES:	225	VOLTAGE	120/208	PHASE:	3	WIRE:	4	MANUF.:	SQUARE D	TYPE:	MODULAR					
GND	CON	LOAD			DESIGNATION	WIRE	BKR	OKT		OKT	BKR	WIRE	DESIGNATION	LOAD			CON	GND		
		A	B	C										A	B	C				
12	3/4"	0.4			STORAGE - RCP	12	GFI	1		2	20/1	12	OFFICE - RCP	1.2			3/4"	12		
12	3/4"		0.7		STORAGE - RCP	12	20/1	3		4	20/1	12	CASH REGISTER - RCP		0.8		3/4"	12		
12	3/4"			0.7	CASH REGISTER - RCP	12	20/1	5		6	20/1	12	CASH REGISTER - RCP			0.8	3/4"	12		
12	3/4"	0.2			BEER CAVE DOOR - RCP	12	20/1	7		8	20/1	12	DONUT CASE	0.2			3/4"	12		
12	3/4"		0.5		HAND DRYER - MENS	12	GFI	9		10	20/1	12	LOTTERY		0.4		3/4"	12		
12	3/4"			0.5	HAND DRYER - WOMENS	12	GFI	11		12	GFI	12	EXTERIOR RECEPTACLES - REAR			0.4	3/4"	12		
12	3/4"	0.8			STORAGE - RCP	12	20/1	13		14	GFI	12	WOMENS RESTROOM - RCP	0.7			3/4"	12		
10	3/4"		3.2		WALK-IN BEV. COOLER COMP.	8	40/3	15		16	20/1	12	TELECOM ROOM - RCP		0.7		3/4"	12		
---	---			3.2	-----	---	---	17		18	20/1		SPARE							
---	---	3.2			-----	---	---	19		20	20/1	12	STOREFRONT - RCP	0.2			3/4"	12		
12	3/4"		0.9		CEILING FANS	12	20/1	21		22	20/1	12	BEER CAVE DOOR HEATERS		1.0		3/4"	12		
12	3/4"			0.4	TELECOM - RCP	12	20/1	23		24	20/1		SPARE							
12	3/4"	1.2			DELI CASE - COMPRESSOR	12	20/2	25		26	40/3	8	WALK-IN FREEZER - COMP.	4.5			3/4"	10		
---	---		1.2		-----	---	---	27		28	---	---	-----		4.5		---	---		
12	3/4"			1.0	SOFT DRINK DOOR HEATERS	12	20/1	29		30	---	---	-----			4.5	---	---		
10	3/4"	3.2			BEER CAVE COMPRESSOR	8	40/3	31		32	20/1	12	WALK-IN FREEZER - LIGHTS	0.5			3/4"	12		
---	---		3.2		-----	---	---	33		34	20/1		SPARE							
---	---			3.2	-----	---	---	35		36	20/1		SPARE							
12	3/4"	0.0			HOOD GAS SOLENOID (SHUNT T.)	12	20/1	37		38	20/1		SPARE							
12	3/4"		0.7		ELEC ROOM - RCP	12	20/1	39		40	20/1	12	FOUNTAIN SIGNS		0.1		3/4"	12		
12	3/4"			0.4	JOCKEY PUMP	12	20/1	41		42	20/1	12	COFFEE TV'S			0.4	3/4"	12		
12	3/4"	0.2			STOREFRONT - RCP	12	20/1	43		44	20/1	12	RCP - MENS RESTROOM	0.7			3/4"	12		
12	3/4"		0.2		STOREFRONT - RCP	12	20/1	45		46	20/1	12	WALK-IN FREEZER - HEAT		0.5		3/4"	12		
12	3/4"			0.2	EXHAUST FAN	12	20/1	47		48	60/2	6	WH-1			4.0	3/4"	10		
					SPARE			49		50	---	---	-----		4.0		---	---		
					SPARE			51		52	GFI	12	HAND DRYER - MENS		0.5		3/4"	12		
					SPARE			53		54	GFI	12	HAND DRYER - WOMENS			0.5	3/4"	12		
					SPARE			55		56	20/1		SPARE							
					SPARE			57		58	20/1		SPARE							
					SPARE			59		60	20/1		SPARE							
					SPARE			61		62	20/1		SPARE							
					SPARE			63		64	20/1		SPARE							
					SPARE			65		66	20/1		SPARE							
					SPD			67		68	20/1		SPARE							
					-----			69		70	20/1		SPARE							
					-----			71		72	20/1		SPARE							
		9.2	10.6	9.6	SUB-TOTAL		KVA							KVA	SUB-TOTAL		12.0	8.5	10.6	
														KVA	GROSS-TOTAL		21.2	19.1	20.2	
EMERGENCY POWER:		NO							MAIN BREAKER:											
BRANCH:							MAIN LUGS:		YES		A.I.C. RATING: 18,000									

PANELBOARD AND WIRING SCHEDULE																					
PANELBOARD:		C		AMPERES:	225	VOLTAGE:	120/208	PHASE:	3	WIRE:	4	MANUF.:	SQUARE D	TYPE:	MODULAR						
GND	CON	LOAD			DESIGNATION	WIRE	BKR	OKT		OKT	BKR	WIRE	DESIGNATION	LOAD			CON	GND			
		A	B	C										A	B	C					
10	3/4"				FUT. BEAN TO CUP MACHINE	10	30/2	1		2	GFI	12	TEA MACHINE	1.0			3/4"	12			
---	---				-----	---	GFI	3		4	20/1		SPARE								
					SPARE			5		6	GFI	12	FOUNTAIN MACHINE			1.0	3/4"	12			
					SPARE			7		8	20/1		SPARE								
					SPARE			9		10	30/1	10	CAPPUCCINO (GFI)		1.0		3/4"	10			
12	3/4"			1.5	INDUCTION RANGE - RCP	12	GFI	11		12	30/1	10	CHOCOLATE CAPPUCCINO (GFI)			1.0	3/4"	10			
					SPARE			13		14	20/1		SPARE								
12	3/4"		1.0		BAKED GOODS RECEPTACLE	12	GFI	15		16	30/2	10	BEAN TO CUP MACHINE		2.5		3/4"	10			
12	3/4"			1.2	FROZEN CARB. BEVERAGE	12	20/2	17		18	GFI	---	-----			2.5	---	---			
---	---	1.2			-----	---	GFI	19		20	GFI	12	FREAL FREEZER	1.2			3/4"	12			
12	3/4"		1.2		FREAL MIXER	12	GFI	21		22	35/3	8	MAU UNIT		2.8		3/4"	10			
					SPARE			23		24	---	---	-----			2.8	---	---			
					SPARE			25		26	---	---	-----				---	---			
					SPARE			27		28	GFI	12	MICROWAVE		1.2		3/4"	12			
					SPARE			29		30	GFI	12	HOOD WALL - RCP			0.8	3/4"	12			
12	3/4"	1.5			COOLER EVAPORATOR	12	20/1	31		32	30/2	10	BEAN TO CUP MACHINE	2.5			3/4"	10			
12	3/4"		1.5		COOLER EVAPORATOR	12	20/1	33		34	GFI	---	-----		2.5		---	---			
12	3/4"			1.0	ICE CHEST	12	GFI	35		36	GFI	12	FREEZER - RCP			1.0	3/4"	12			
12	3/4"	1.0			ICE CHEST	12	GFI	37		38	GFI	12	REFRIGERATED CASE	0.4			3/4"	12			
					SPARE			39		40	50/2	8	STEAM TABLE		2.6		3/4"	10			
					SPARE			41		42	GFI	---	-----			2.6	---	---			
10	3/4"	1.7			ICEMAKER - INDOOR UNIT	10	20/2	43		44	GFI	12	REFRIGERATED CASE	0.4			3/4"	12			
---	---		1.7		-----	---	---	45		46	GFI	12	HOOD WALL - RCP		1.0		3/4"	12			
12	3/4"			1.2	CREAM AND SUGAR MACH.	12	GFI	47		48	GFI	12	CARBONATION PUMPS			1.0	3/4"	12			
					SPARE			49		50	GFI	12	HOOD WALL - RCP		0.4		3/4"	12			
					SPARE			51		52	20/1	12	DELI ISLAND - RCP		0.7		3/4"	12			
					SPARE			53		54	20/1		SPARE								
					SPARE			55		56	20/1		SPARE								
					SPARE			57		58	20/1		SPARE								
					SPARE			59		60	20/1		SPARE								
					SPARE			61		62	20/1		SPARE								
					SPARE			63		64	20/1		SPARE								
					SPARE			65		66	20/1		SPARE								
					SPD			67		68	20/1		SPARE								
					-----			69		70	20/1		SPARE								
					-----			71		72	20/1		SPARE								
													KVA	SUB-TOTAL		8.7	14.3	12.7			
													KVA	GROSS-TOTAL		14.1	19.7	17.6	51.4		
EMERGENCY POWER:		NO		MAIN BREAKER:																	
BRANCH:				MAIN LUGS:						YES		A.I.C. RATING: 18,000									

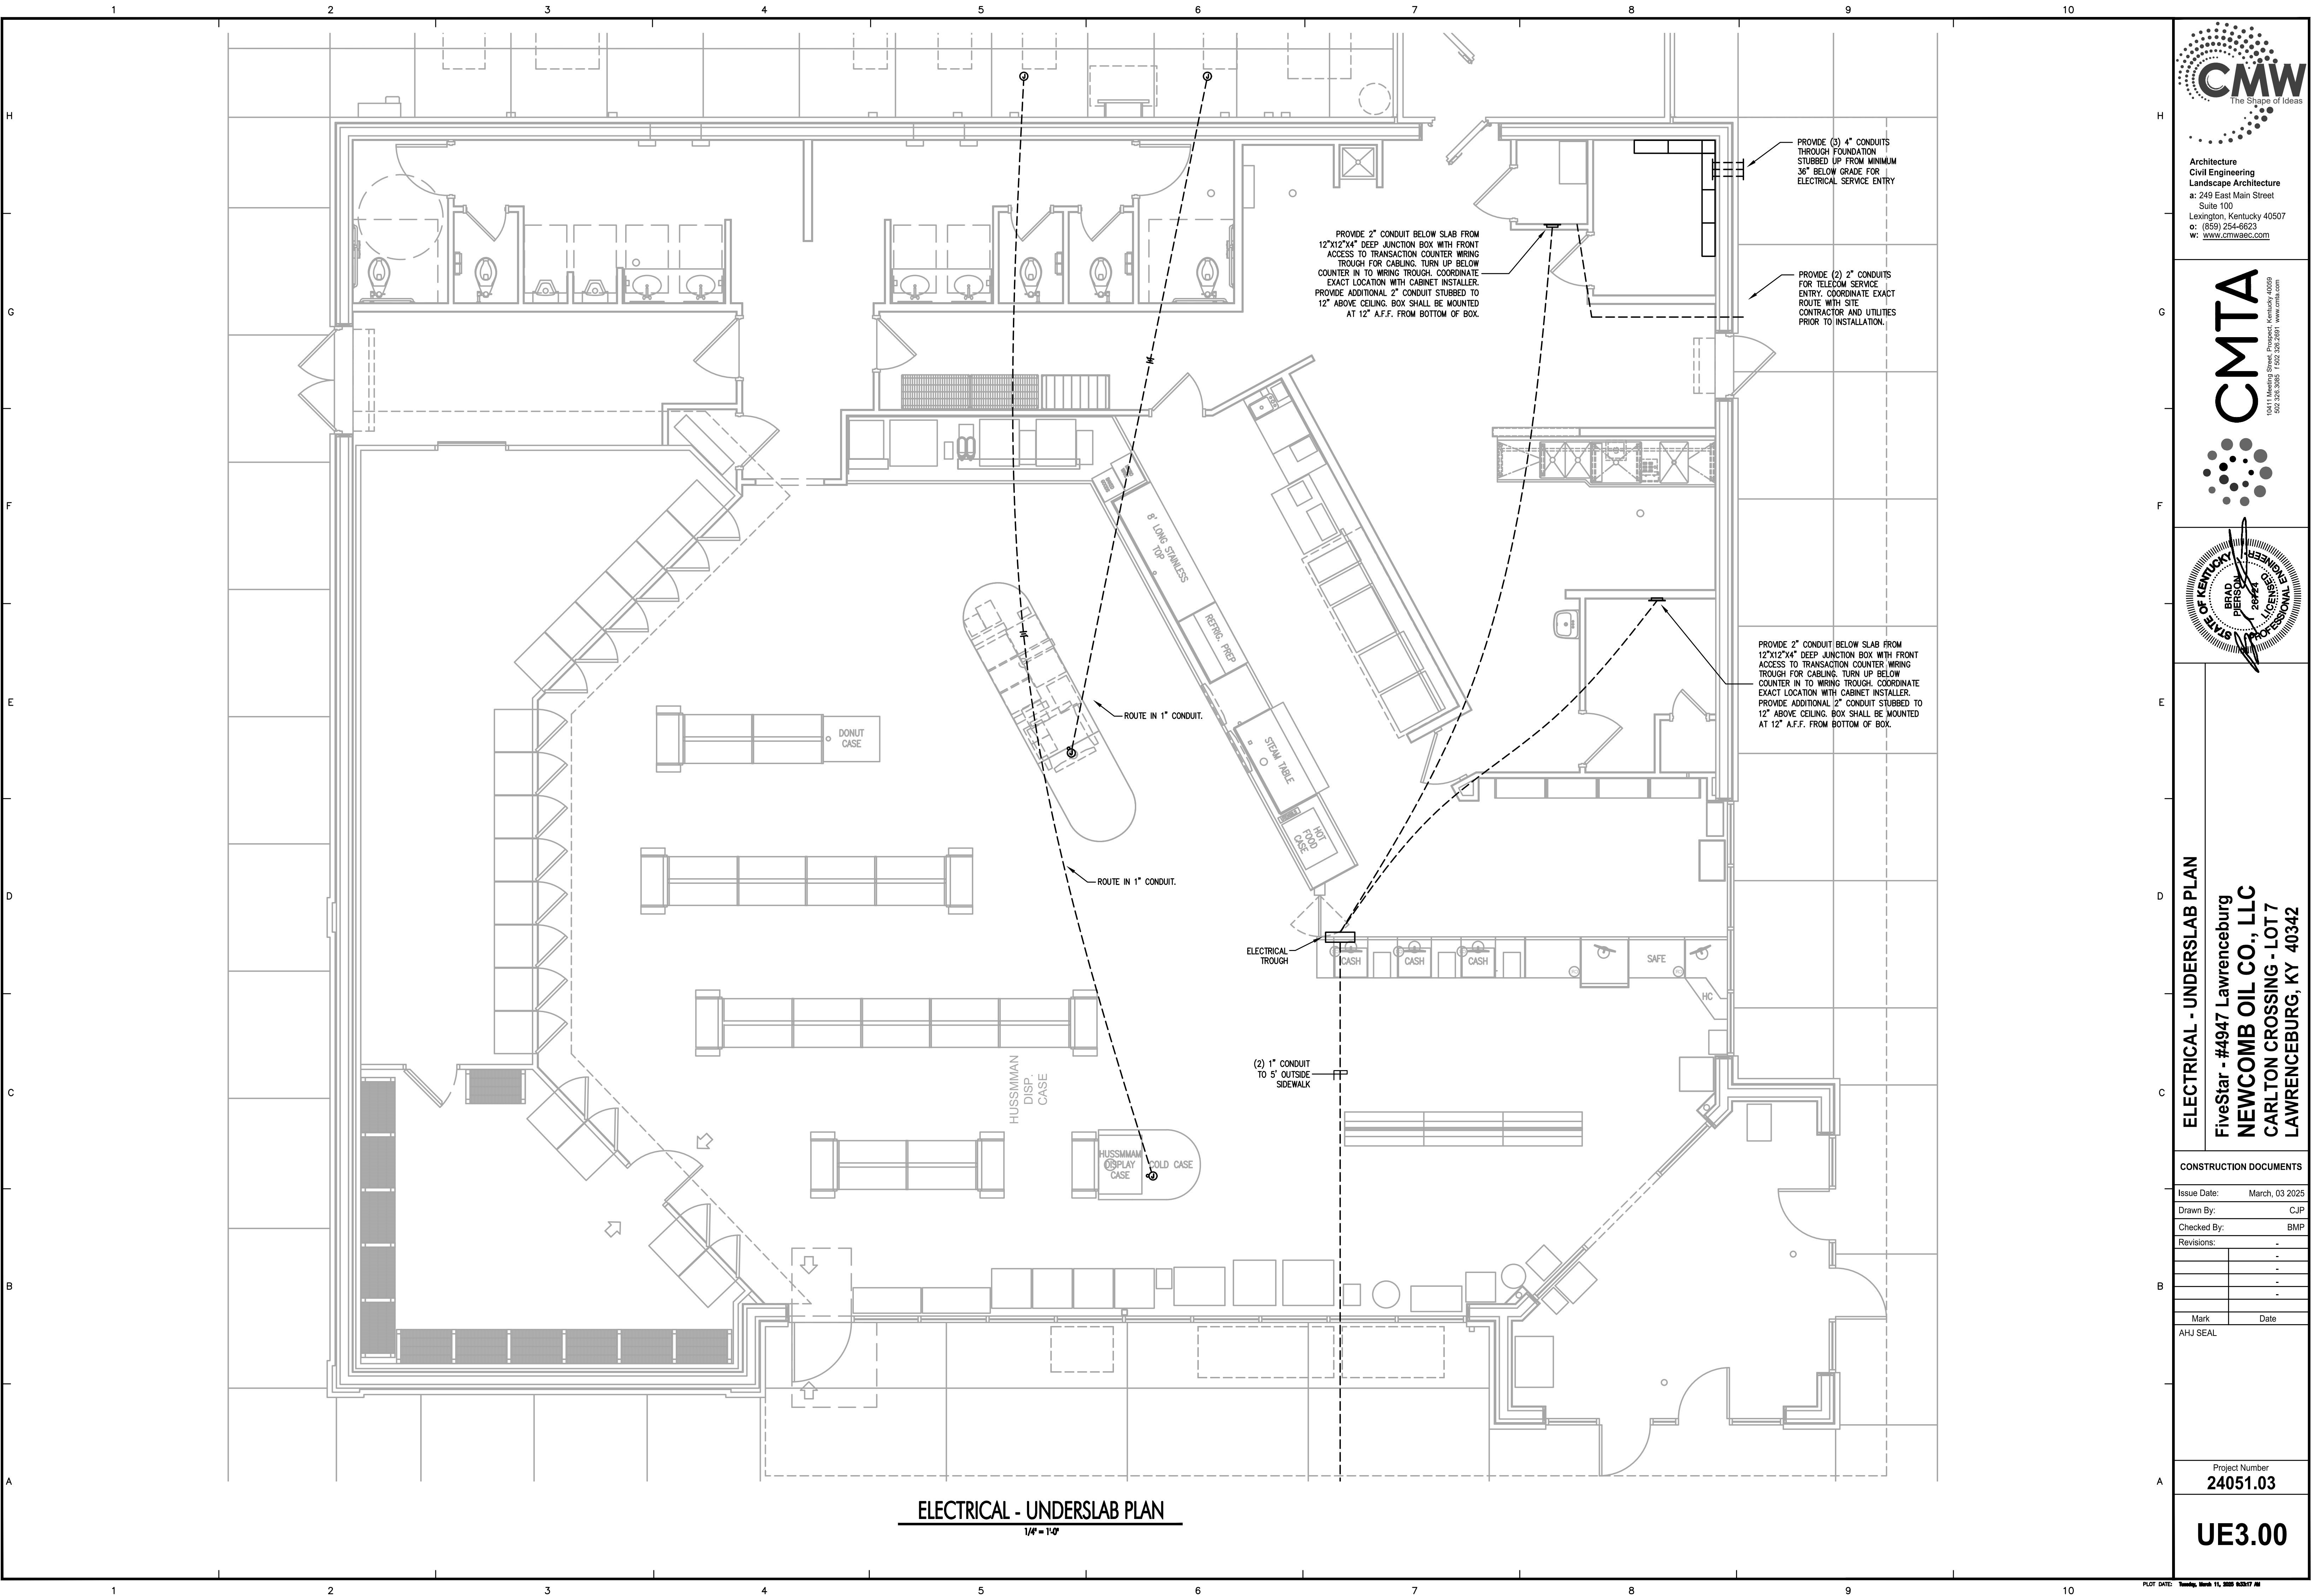

Architecture
Civil Engineering
Landscape Architecture
a: 249 East Main Street
Suite 100
Lexington, Kentucky 40507
o: (859) 254-6623
w: www.cmwmaec.com

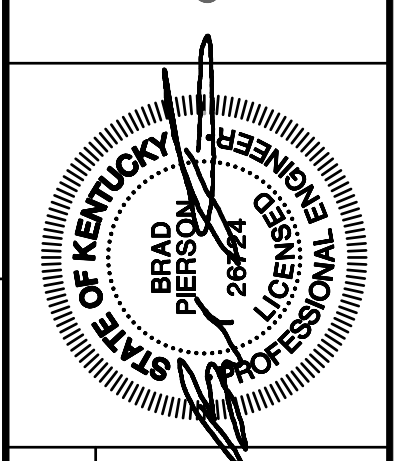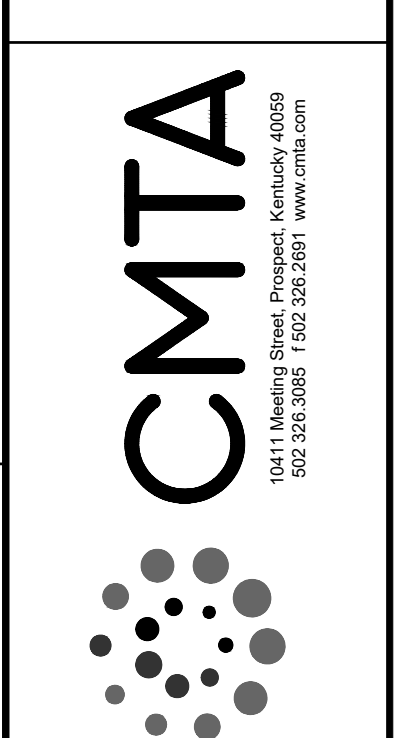

ELECTRICAL - UNDERSLAB PLAN
FiveStar - #4947 Lawrenceburg
NEWCOMB OIL CO., LLC
CARLTON CROSSING - LOT 7
LAWRENCEBURG, KY 40342

CONSTRUCTION DOCUMENTS

Issue Date:	March, 03 2025
Drawn By:	CJP
Checked By:	BMP
Revisions:	
	-
	-
	-
	-
Mark	Date
AHU SEAL	

Project Number
24051.03

UE3.00